



HM43 Installation Instructions

For Single Blinds


Step 1: Mount Brackets.

Mount the installation brackets in desired position to the wall or ceiling, with appropriate screws.




Step 2: Mount Motor End.

Mount the blind motor end first, ensure bracket grooves and tongue meet into slots on the disc on the end of the motor.

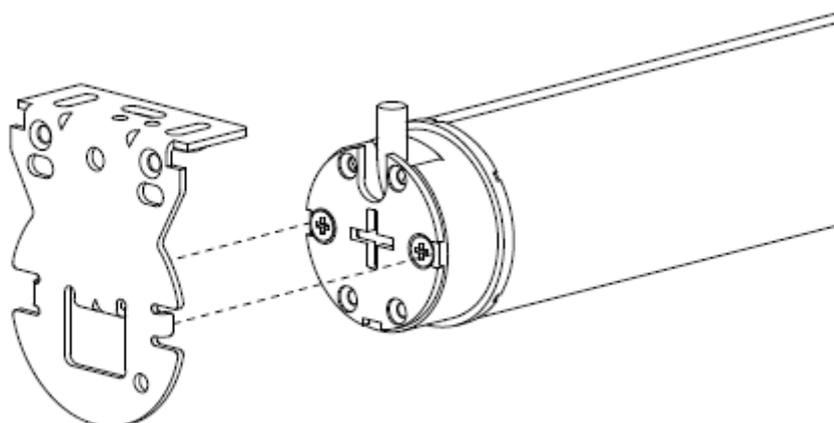

Step 3: Mount Idle End.

Mount the idler into the idle end bracket by pushing it into the recessed slot of the bracket. The idle end is compressible so it will press in, then click when it is securely positioned.

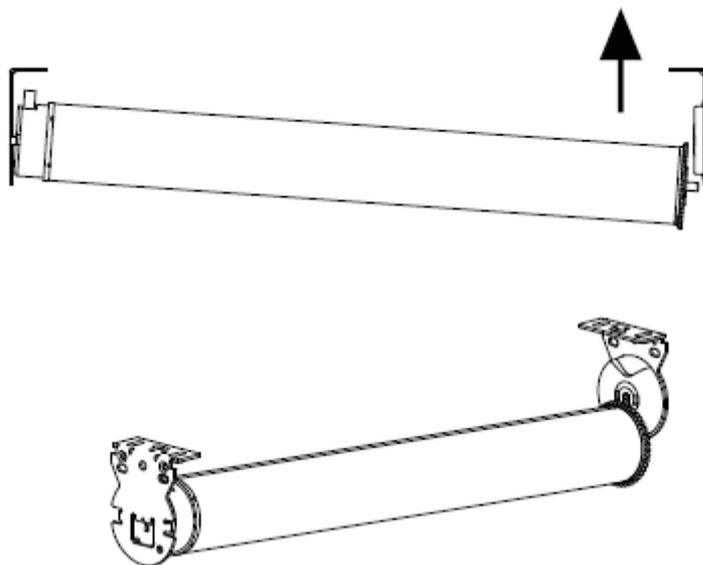


If the blind is loose between the brackets, the idler pin can be extended in increments of 1mm, up to a maximum of 10mm. This will allow the blind width to be extended to provide a better fit. To extend the idler pin please rotate the plastic disc. You will hear it click at each increment.

Standard Install Position



Extended Install Position

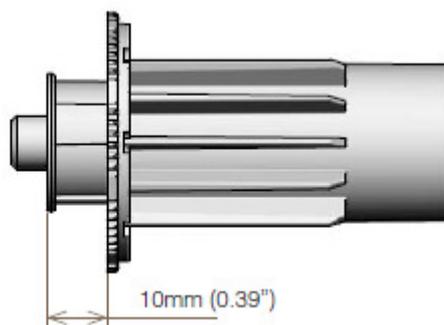


Step 4: Test blind.

Once the blind is securely fitted in the brackets, you may like to connect a test lead to the power cable so that you can run the blind up and down before it has been properly connected to power by a qualified electrician.

Test blind to make sure that the fabric rolls up without running off to the side too far and hitting the brackets.

Do any final tuning that may be required.

To do this roll the fabric all the way down to expose the roller tube, then apply small squares of masking tape to the tube on either the left or right hand side depending which direction the fabric is rolling off. Call Helioscreen for further information if required.

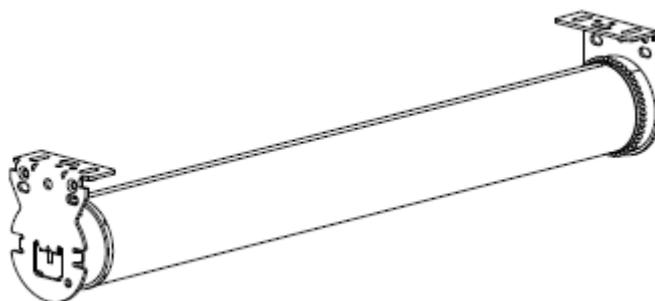

Step 5. Set the motor limits.

For electrical wiring diagrams / information, the relevant Somfy documentation will be provided. If the blind is remote controlled, set the limits as instructed in the Somfy documentation provided. If no documents are provided please contact Helioscreen.

Once the motor limits are set, blind installation is now complete.