



HCH43 Installation Instructions

For Single Blinds


Step 1: Mount Brackets.

Mount the installation brackets in desired position to the wall or ceiling, with appropriate screws.




Step 2: Mount Control End.

Mount chain winder onto control bracket with the chain guard positioned facing up.

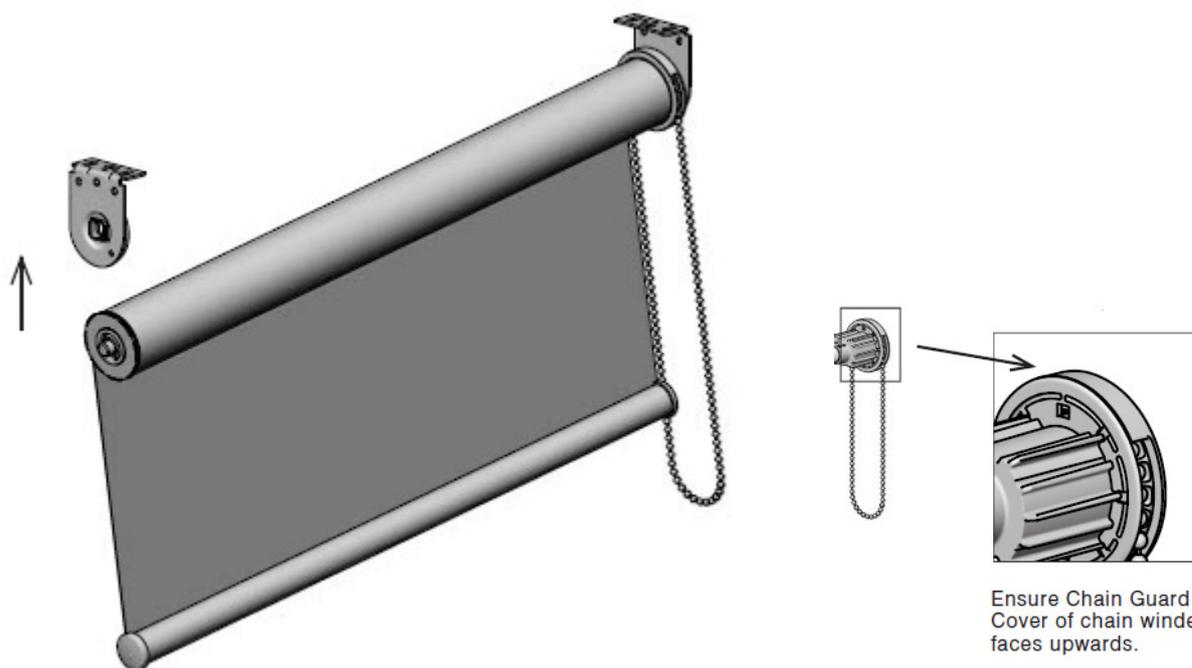


Step 3: Mount Idle End.


Mount the idler into the idle end bracket by pushing it into the recessed slot of the bracket. The idle end is compressible so it will press in, then click when it is securely positioned.

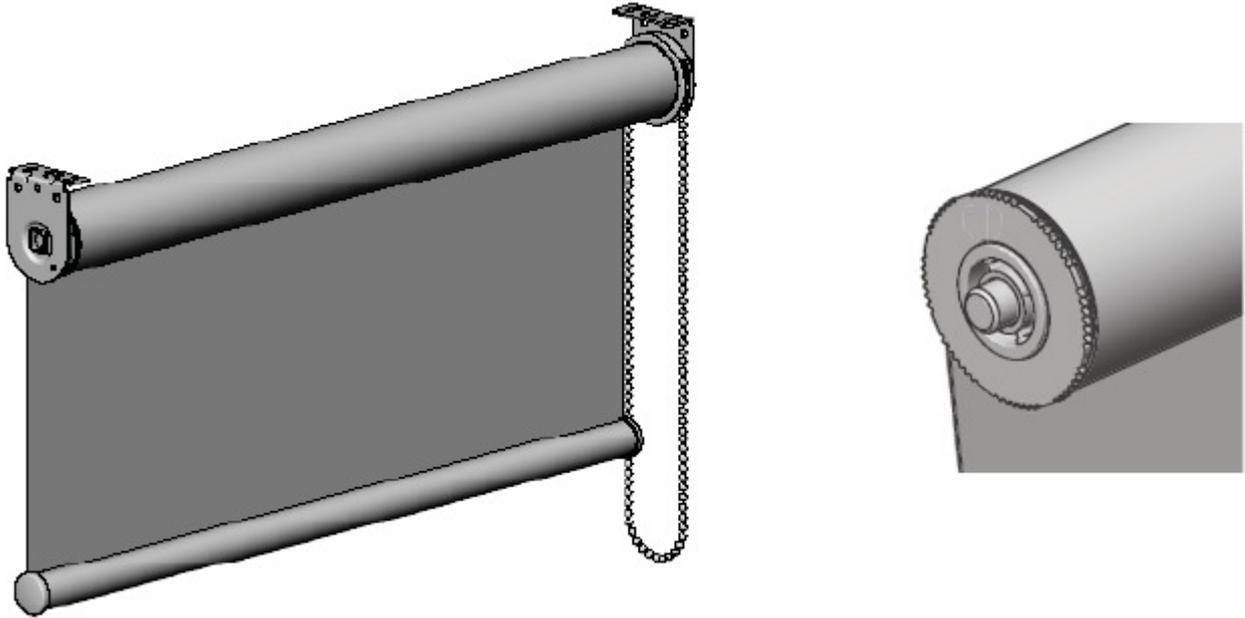

When operating the blind, the chain should be in the vertical position.

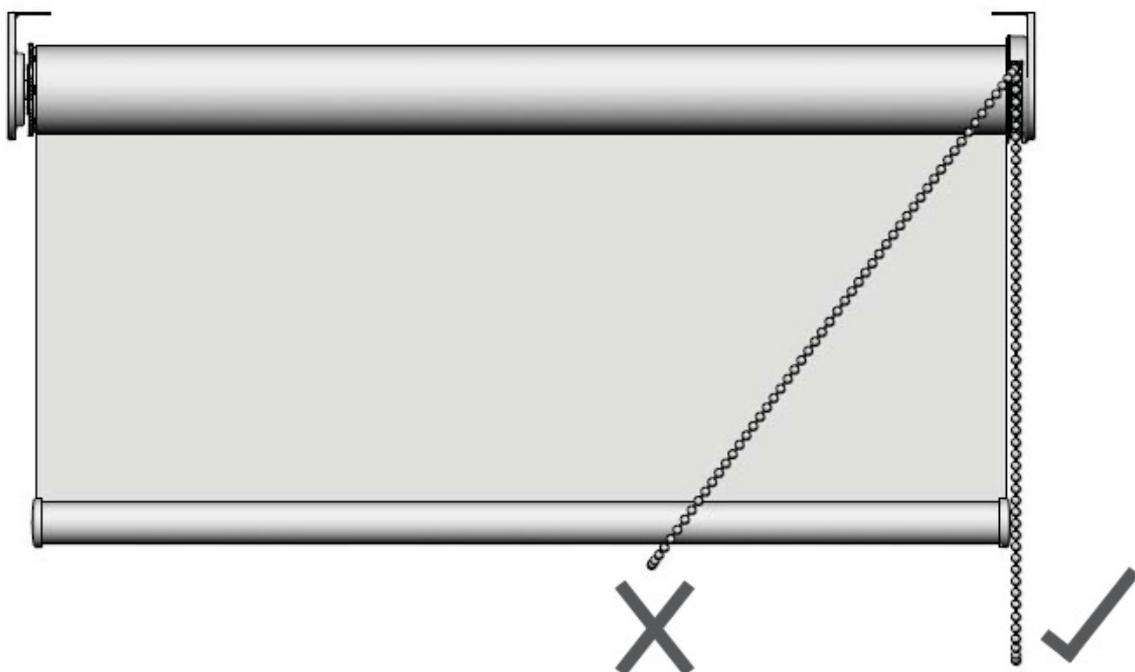

If the blind is loose between the brackets, the idler pin can be extended in increments of 1mm, up to a maximum of 10mm. This will allow the blind width to be extended to provide a better fit. To extend the idler pin please rotate the plastic disc. You will hear it click at each increment.

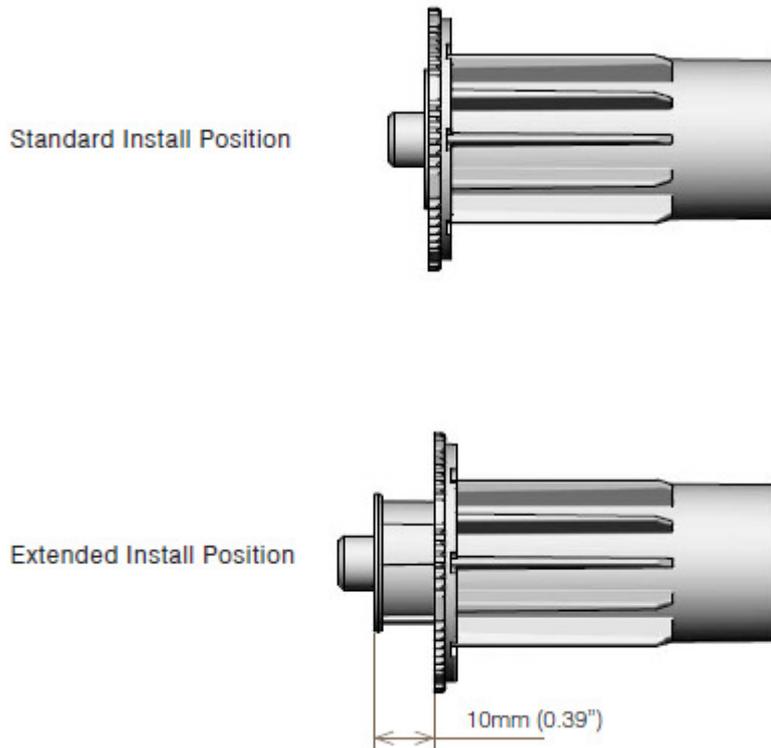

Step 4: Test blind.

Once the blind is securely fitted in the brackets, test the blind by running it up and down to make sure that the fabric rolls up without running off to the side too far and hitting the brackets.

Do any final tuning that may be required.

To do this roll the fabric all the way down to expose the roller tube, then apply small squares of masking tape to the tube on either the left or right hand side depending which direction the fabric is rolling off. Call Helioscreen for further information if required.

Step 4: Secure the chain safety device.

Securely mount the chain safety device to the wall with the appropriate screw.



Step 5. Install ball stops on chain.

Position the round ball stops onto the chain so that the blind stops at the desired positions at the top and bottom of window.

The blind is now installed and ready for use.